


SCHEMATIC CIRCUIT DIAGRAM

SCHEMATIC DIAGRAM

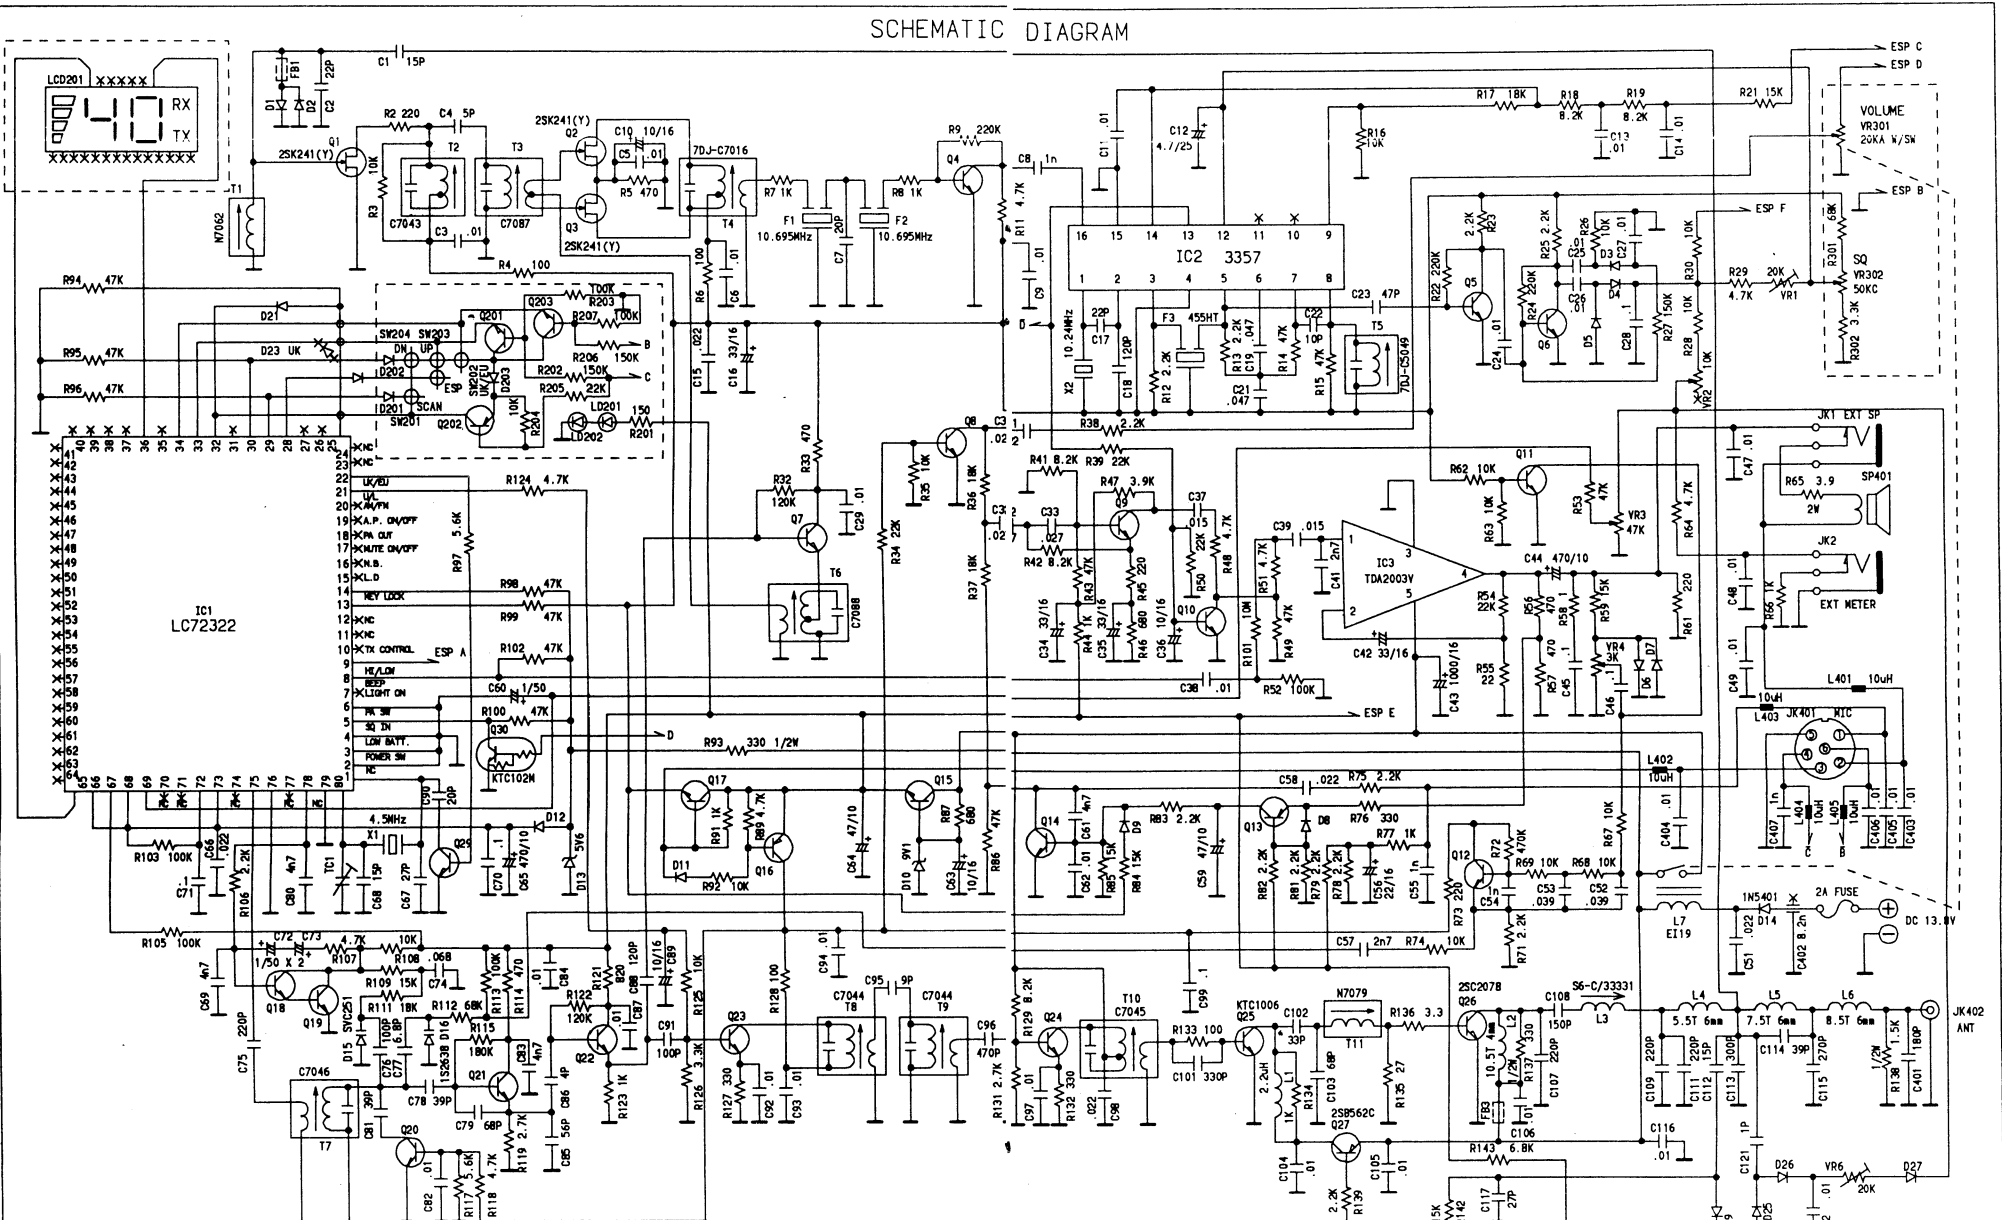

NOTES

- 1) ALL RESISTANCE VALUES ARE INDICATED IN "OHM" (1M = 1000 OHM , 1K = 1000 OHM)
- 2) ALL CAPACITANCE VALUES ARE INDICATED IN "uF" (1n = .001 uF , 1P = .001 nF)
- 3) NOT INDICATED DIODE ARE 1N4148.
- 4) Q4,Q20,Q29 : 2SC5345M(Y). Q13,Q202 : 2SA1980M(Y). Q17,24,28 : 2SC5343(Y).
- 5) Q5 TO 12,14,18,19,21 TO 23,Q201,Q203,501,502,503 : 2SC5343M(Y). Q16 : 2SA1980(Y).

REMARK : SOME COMPONENTS SUBJECT TO CHANGE FOR AN IMPROVEMENT WITHOUT NOTICE

